




**MK2006N**

**N-Channel 60-V(D-S) Power MOSFET**

V(BR)DSS	RDS(on)MAX	ID
60 V	45mΩ@ 10 V	20A
	50mΩ@ 4.5 V	

**Equivalent Circuit:**

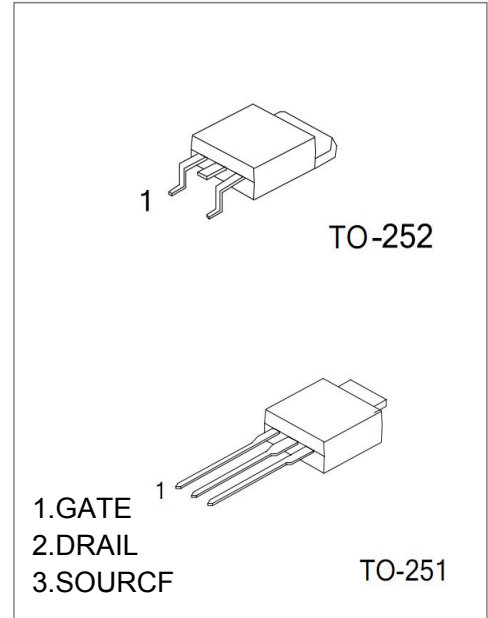

**General Description:**


The high voltage MOSFET uses an advanced termination scheme to provide enhanced voltage-blocking capability without degrading performance over time. In addition , this advanced MOSFET is designed to withstand high energy in avalanche and commutation modes . The new energy efficient design also offers a drain-to-source diode with a fast recovery time. Designed for high voltage, high speed switching applications in power suppliers, converters and PWM motor controls , these devices are particularly well suited for bridge circuits where diode speed and commutating safe operating areas are critical and offer additional and safety margin against unexpected voltage transients.

**MARKING: MK 20N06 MKD / U \*\*\*\***  
(D-252) / (U-251)

**FEATURE:**

- ※ Power switching application
- ※ Hard switched and high frequency circuits
- ※ Uninterruptible power supply
- ※ Fully characterized avalanche voltage and current
- ※ Excellent package for good heat dissipation
- ※ Good stability and uniformity with high EAS

**SYMBOL:**

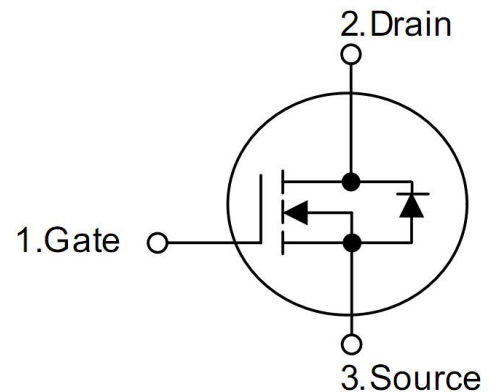

**Maximum ratings ( Ta=25°C unless otherwise noted)**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	VDS	60	V
Gate-Source Voltage	VGS	±20	
Continuous Drain Current	ID	20	A
Pulsed Diode Curren	IDM	40	
Power Dissipation	PD	50	W
Thermal Resistance from Junction to Ambient (t≤10s)	RθJA	100	°C/W
Operating Junction	TJ	150	°C
Storage Temperature	TSTG	-55~+150	



**MOSFET ELECTRICAL CHARACTERISTICS**

**Static Electrical Characteristics (Ta = 25 °C Unless Otherwise Noted)**


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Drain-source breakdown voltage	V(BR)DSS	VGS = 0V, ID = 250μA	60			V
Gate-source threshold voltage	VGS(th)	VDS = VGS, ID = 250μA	1		3	V
Gate-source leakage	IGSS	VDS = 0V, VGS = ±20V			±100	nA
Zero gate voltage drain current	IDSS	VDS = 60V, VGS = 0V			1	μA
Drain-source on-state resistancea	RDS(on)	VGS = 10V, ID = 10A		38	45	mΩ
		VGS = 4.5V, ID = 5A		43	50	mΩ
Forward transconductancea	gfs	VDS = 25V, ID = 20A		10		S
Diode forward voltage	VSD	IS= 2A, VGS=0V		0.85	1.5	V
<b>Dynamic</b>						
Input capacitance	Ciss	VDS = 25V, VGS = 0V, f=1MHz		500		pF
Output capacitance	Coss			150		pF
Reverse transfer capacitanceb	Crss			82		pF
Total gate charge	Qg	VDS = 30V, VGS = 10V, ID = 20A		31		nC
Gate-source charge	Qgs			10		nC
Gate-drain charge	Qgd			6		nC
<b>Switchingb</b>						
Turn-on delay time	td(on)	VDD= 30V RL= 25Ω, ID = 20A, VGEN= 10V, Rg= 25Ω		10		ns
Rise time	tr			23		ns
Turn-off delay time	td(off)			64		ns
Fall time	tf			31		ns
<b>Drain-Source Diode Characteristics</b>						
Continuous Source-Drain Diode Current	IS				20	A
Pulsed Diode forward Curren	ISM				80	A

**Note :**

1. Repetitive Rating : Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t < 10 sec.
3. Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production testing.




PACKAGE OUTLINE DIMENSIONS :

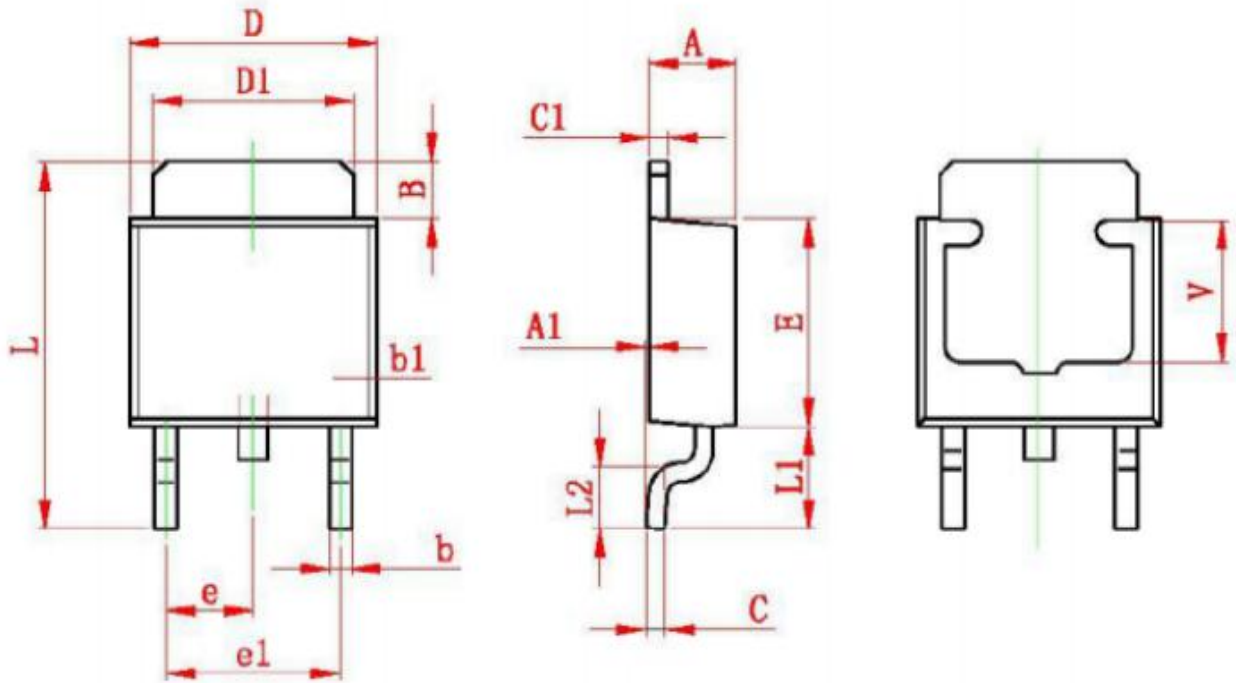

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP		0.091 TYP	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
V	3.80 REF		0.150 REF	



PACKAGE OUTLINE DIMENSIONS :

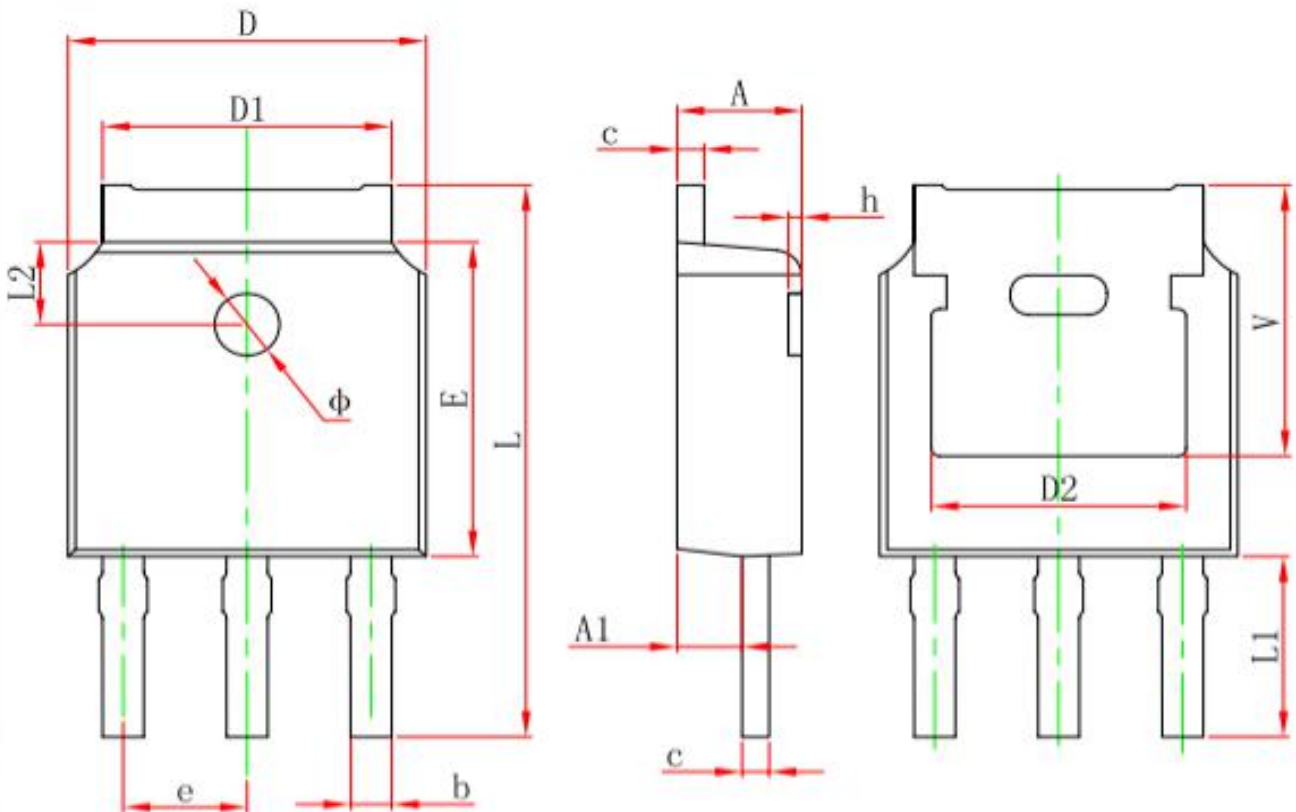

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.860	1.160	0.034	0.046
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	10.400	11.000	0.409	0.433
L1	3.300	3.700	0.130	0.146
L2	1.600 REF.		0.063 REF.	
Φ	1.100	1.300	0.043	0.051
h	0.000	0.300	0.000	0.012
V	5.350 REF.		0.211 REF.	